


DISPLAY CENTRAL

VISU 210

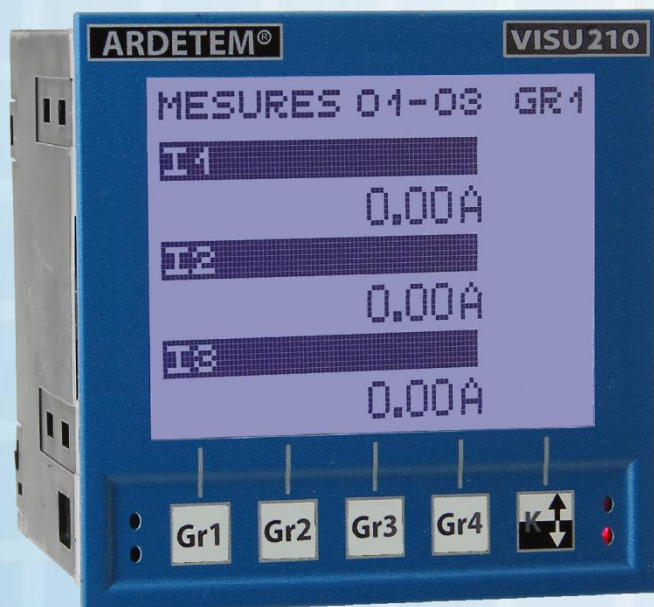

Non-tactile graphical reat lit LCD.

Isolated digital communications RS485 Modbus/Jbus.

Ethernet Modbus-TCP link.

Choice of the digital data link for each measure.

Display configuration on 4, 8, 12 or 16 pages.

3 measures per page.

Display per measure: 10 digits + sign + decimal point.

Possibility to programme a visual alarm setpoint on each measure.

Applications:

- *Reading of the external measures outside of the electrical cabinets.*
- *Display of the process, temperature values ... (via the digital data links)*

Coding:

- *VISU210 P04: 4 pages*
- *VISU210 P08: 8 pages*
- *VISU210 P12: 12 pages*
- *VISU210 P16: 16 pages*

Universal power supply: 20 to 250 vac / 21.5 to 250 vdc

Isolation inputs/supply: 3 kV.

Self-extinguishing case of black UL 94V0 ABS

IP20 housing – IP65 front face

Dimensions: 96 x 96 x 103 mm