LOOP ISOLATOR

self-powered

ELITs 1 - ELITs 2

IP20

CONVERTER

Type

- The ELITs solves common point problems that may occur on measure loops, and also helps to prevent rejections of inducted disturbances on the cables.
- The ELITs isolates sensors or transmitters from process receivers (PLCs, data takers, etc.)

Installation in ATEX / IECEx area 2
Installation in division 2 cFMus



Functions

- 1 or 2 isolated meas. channels
- Isolation input / output
- Transfer ratio 1 / 1
- High transmission accuracy
- High load impedance
- Self supplied by the input signal
- Reduced dimensions


Marking:


CE


Ex II 3 G Ex nA IIC T4 Gc
Class I, Div.2, Groups A, B, C, D T4

DIMENSIONS, WIRING

ELITs: dimensions: 7.2 x 114 x 114 mm

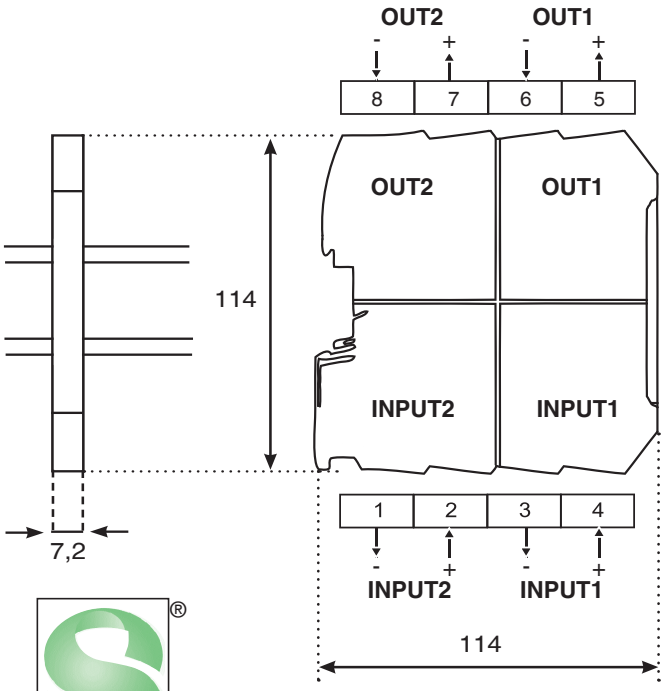

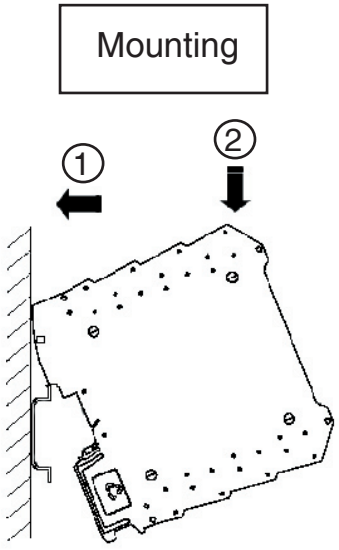

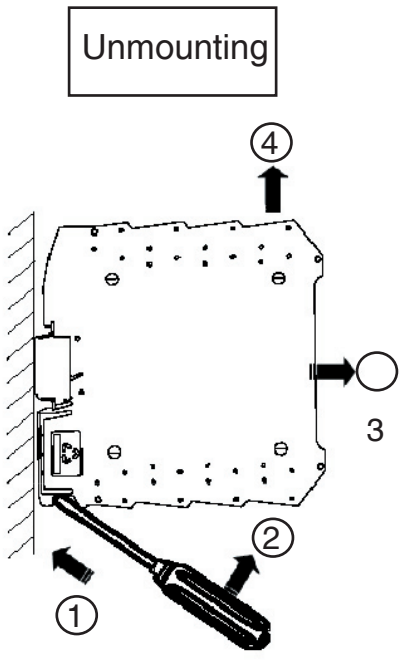

sfere®
The friendly interface

CA
CO/138

TECHNICAL FEATURES AT 23°C

		ELITs 1	ELITs 2
INPUT	**Number of channels**	**1** channel	**2** channels
	Current	0..4..20..50 mA	0..4..20..50 mA
	Internal voltage drop at 20mA	≤ 1.5 V	≤ 1.5 V
	Load loss	I x Lr + 1.5 V	I x Lr + 1.5 V
	Max. voltage drop (output loop open)	Ue = 18.5 VDC	Ue = 18.5 VDC
	Impedance in Ω at 20 mA	Lr+ 75 Ω	Lr + 75 Ω
OUTPUT	**Number of channels**	**1** channel	**2** channels
	Current	0..4..20..50 mA	0..4..20..50 mA
	Max load (Lr in Ω) admissible at 20 mA	700 Ω	700 Ω
SUPP.	**Power supply**	**Self-powered** by the input loop	**Self-powered** by the input loop
GENERALS	**Nominal response time (0 to 90%)**	<1 ms	<1 ms
	Accuracy at nominal conditions at 20mA Grade Temperature influence Lr: load resistance influence	 0.1 % at Lr=0 Ω ±0.01 % / °C for Lr ≤ 700Ω ±0.05% / 100Ω for Lr ≤ 700Ω	 0.1 % at Lr=0 Ω ±0.01 % / °C for Lr ≤ 700Ω ±0.05% / 100Ω for Lr ≤ 700Ω
	Temperatures Operating temperature Storage temperature	 -25 to +70°C -40 to +85 °C	 -25 to +70°C -40 to +85 °C
	Others Convertion ratio Insulation Input/output and bet. channels Condense free dampness	 1 / 1 2.5 Kv 50Hz 1mn 85 %	 1 / 1 2.5 Kv 50Hz 1mn 85 %
	Compliance with standards	EMC 2014/30/UE IEC 61000-6-4 rejection IEC 61000-6-2 immunity (<2% of the measure range)	EMC 2014/30/UE IEC 61000-6-4 rejection IEC 61000-6-2 immunity (<2% of the measure range)
	Electrical safety	EN 61010-1 UL 508 17th ed.	EN 61010-1 UL 508 17th ed.
	ATEX 2014/34/UE area 2 IECEx area 2 Hazardous locations	EN 60079-0, EN 60079-15 IEC 60079-0, IEC 60079-15 ANSI/ISA 12.12.01	EN 60079-0, EN 60079-15 IEC 60079-0, IEC 60079-15 ANSI/ISA 12.12.01
MECHANICAL	**Dimensions H x L x D**	114 x 7.2 x 114 mm	114 x 7.2 x 114 mm
	Tightening	Symmetrical DIN rail	Symmetrical DIN rail
	Housing	self-extinguishing case of PBT	self-extinguishing case of PBT
	Tightness	Housing / terminals IP 20	Housing / terminals IP 20
	Terminals	Screwed connections for flexible or rigid 2.5 mm² wires	Screwed connections for flexible or rigid 2.5 mm² wires
	Weight	63 g	78 g

SFERE - CA CO/138 D -10/26 - Any data in this documentation may be modified without prior notice.

This instrument is dedicated to industrial applications. It has to be mounted in an electrical cabinet, or equivalent.

Société Française d'Etudes et de Réalisations Electroniques - SFERE
RCS Lyon 423-502-608 - Printed in France

Route de Brindas - Parc d'Activité d'Arbora - N°2
69510 SOUCIEU EN JARREST - FRANCE

Tél. : 04 78 16 04 04 Fax. : 04 78 16 04 05
Tel. Intern. : 33 4 78 16 04 04 Fax Intern. : 33 4 78 16 04 05
e-mail : info@sfere-net.com http : //www.sfere-net.com

Your representative